



SQUARE WOVEN NET

Mesh HxL	Ø wire	panel HxL
10x10	2	4,5
15x15	2,4	4,5
20x20	2,4	3,5
20x20	3	5,5
30x30	3	4
40x40	3	2,8
30x30	4	7
40x40	4	5,3
50x50	4	4
35x35	5	9
40x40	5	7,5
50x50	5	6,5
60x60	5	5
40x40	6	11
60x60	6	8




SQUARE WELDED MESH

Mesh HxL	Ø wire	panel HxL
30x30	2,85	1200x2400
30x30	4	1200x2400
40x40	4	1000x2000
40x40	4	1100x2200
40x40	4	1200x2400
50x50	2,85	1200x2400
50x50	4	1000x2000
50x50	4	1200x2400
50x50	5	1200x2400




RECTANGULAR WELDED MESH

Mesh HxL	Ø wire	panel HxL
50x30	2,85	1200x2400
50x30	4	1200x2400
50x100	2,85	1200x2400
50x100	4	1200x2400




ANTI-HEEL

Tipologia				Grata	
Mesh	Barra portante	Barra trasversale	Dimensioni	Peso	
				Zincato	Grezzo
mm	mm	mm	mm	kg/m ²	kg/m ²
15x76	25x2	Ø 4	6100x1000	29,5	27,7
	30x2	Ø 4		32,2	32,9
	25x3	Ø 5		44	41,1
	30x3	Ø 5		52,5	49
	40x3	Ø 5		69,3	64,8

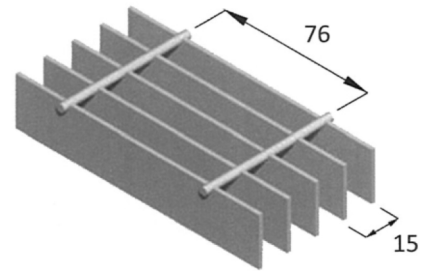


ANTI-SPHERE

Tipologia				Grata	
Mesh	Barra portante	Barra trasversale	Dimensioni	Peso	
				Zincato	Grezzo
mm	mm	mm	mm	kg/m ²	kg/m ²
22x38	25x2	◇ 4	6100x1000	23,3	21,7
	30x2	◇ 4		27,2	25,5
	25x3	◇ 4		34,1	31,8
	30x3	◇ 4		40,0	37,4
22x76	25x2	◇ 4	6100x1000	21,5	20,2
	30x2	◇ 4		25,5	23,9
	25x3	◇ 5		31,7	29,8
	30x3	◇ 5		37,2	35,3
	40x3	◇ 5		49,6	46,4

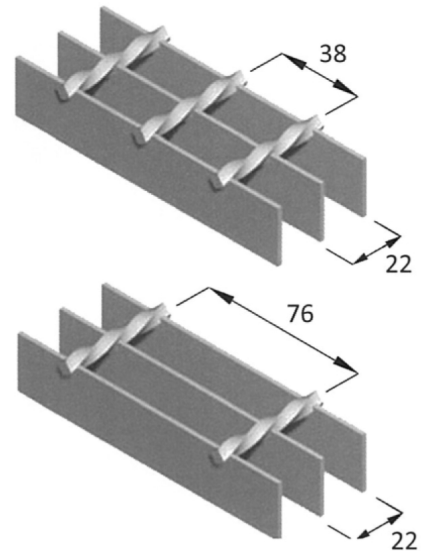

BUILDING

Tipologia			Grata		
Mesh	Barra portante	Barra trasversale	Dimensioni	Peso	
				Zincato	Grezzo
mm	mm	mm	mm	kg/m ²	kg/m ²
25x24	25x2	Ø 4	6100x1000	21,4	20,0
25x76	25x2	Ø 4	6100x1000	18,7	17,4
	30x2	Ø 4		22,1	20,6
	25x3	Ø 4		27,6	25,8
	30x3	Ø 4		32,7	30,6
	40x3	Ø 4		43,1	40,3
	50x4	Ø 5		71,1	66,3
	60x4	Ø 5		84,8	79,2
70x4	Ø 5	98,6	92,1		

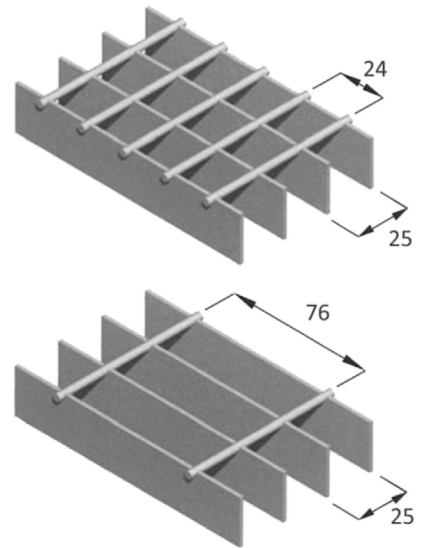

According to the D.M. June 14, 1989 n. 236 - art. 4.2.2.


The gratings used in the walkways must have meshes with gaps that do not constitute an obstacle or danger with respect to wheels, support sticks and the like.

According to the D.M. June 14, 1989 n. 236 - art. 8.2.2.

The gratings inserted in the flooring must be made with meshes that cannot be crossed by a sphere of 2 cm in diameter.


INDUSTRY

Tipologia				Grata	
Mesh	Barra portante	Barra trasversale	Dimensioni	Peso	
				Zincato	Grezzo
mm	mm	mm	mm	kg/m ²	kg/m ²
30x50	25x2	◇ 5	6100x1000	24,8	32,2
	30x3	◇ 5		29,1	27,2
	40x3	◇ 5		37,7	35,2
	40x4	◇ 5		49,8	46,6
30x100	25x3	◇ 5	6100x1000	23,1	21,6
	30x3	◇ 5		27,4	25,6
	40x3	◇ 5		36	33,6
	40x4	◇ 5		47,7	44,6

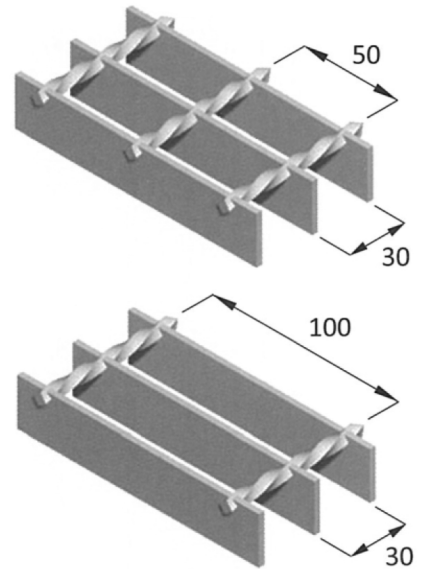

INDUSTRY

Tipologia				Grata	
Mesh	Barra portante	Barra trasversale	Dimensioni	Peso	
				Zincato	Grezzo
mm	mm	mm	mm	kg/m ²	kg/m ²
34x38	25x2	◇ 4	6100x1000	16,2	15,1
	30x2	◇ 4		18,7	17,5
	25x3	◇ 5		23,4	21,8
	30x3	◇ 5		27,1	25,4
	40x3	◇ 5		34,7	32,5
34x76	25x2	◇ 4	6100x1000	14,4	13,4
	30x2	◇ 4		16,9	15,8
	25x3	◇ 5		21,1	19,8
	30x3	◇ 5		24,9	23,3
	40x3	◇ 5		32,5	30,4

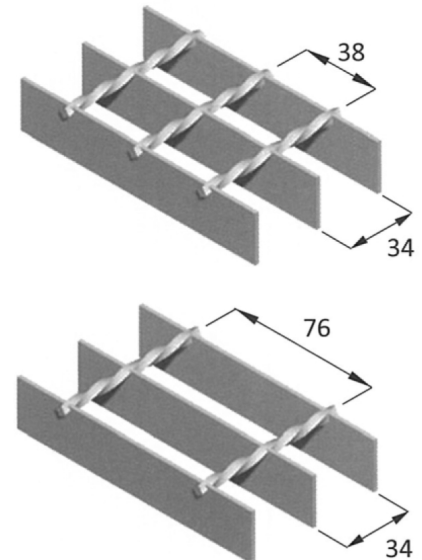

STEPS

Complete with plate to be bolted and visual breaker

Upholstery
material

S 235 JR steel (UNI EN 10025: 2005)
Hot dip galvanizing (UNI EN ISO
1461: 1999)

mesh	Barra portante	Barra trasversale	Lg x Pg	Peso Zincato
mm	mm	mm	mm	kg/cad
15x76	25x2	Ø 4	1200x325	13,8
	30x2	Ø 4	1200x325	15,7
25x76	25x2	Ø 4	600x267	4,2
	25x2	Ø 4	800x267	5,8
	30x2	Ø 4	800x267	6,5
	25x3	Ø 4	1000x267	9,4
	30x2	Ø 4	1000x267	7,9

